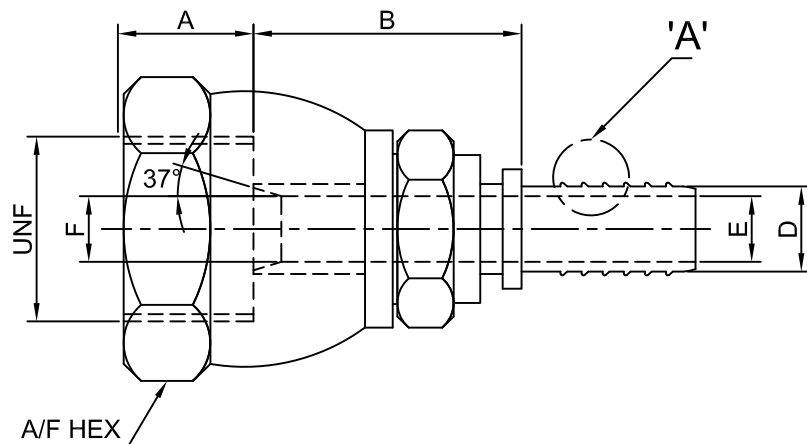


DETAIL 'A'

FEMALE JIC CRIMP FITTING

DESCRIPTION

- HYDRAULIC HOSE JIC FITTINGS CONFIRM TO BRITISH STANDARD PIPE (JIC) TECHNICAL STANDARDS.
- THE ANGLE OF THE SEALING SURFACE IS 60° FOR BOTH FORMS.
- HYDRAULIC HOSE FITTINGS CONNECT HOSE TO PUMP, VALVES, CYLINDERS AND OTHER COMPONENTS USED THROUGHOUT A HYDRAULIC SYSTEM.
- JIC HYDRAULIC HOSE CONNECTIONS ARE SUITABLE FOR HIGH PRESSURE CONNECTIONS IN HYDRAULIC FIELDS.

FEATURES

- GOOD VIBRATION RESISTANCE.
- HIGH PRESSURE RATING.
- AN EFFECTIVE SEAL BETWEEN THE FITTINGS AND THE FLARED TUBE

General Note:

1. All dimensions are in mm unless stated.
2. 100 % Factory tested.
3. Standard tolerances shall apply.

Drawing Title:

FEMALE JIC CRIMP FITTING

Prepared By:

V.A.

Checked By:

T.A.

Approved By:

Y.J.

Date:

12/07/2022

CLIENT NAME:

QUOTE NO:-

VK-LOK

SR. NO.	PART NO.	SIZE		THREAD SIZE - UNF	DIMENSIONS					MATERIAL	PRESSURE RATING
		HOSE SIZE - D	TUBE SIZE		A	B	E	F	A/F HEX		
1	VK-FJC-FE-02-04	3/16"	1/4"	7/16"-20	9.7	14.1	3.2	4.5	15.9	SS 316	6000 PSI
2	VK-FJC-FE-04-04	1/4"	1/4"	7/16"-20	9.7	14.9	4.5	4.5	15.9	SS 316	6000 PSI
3	VK-FJC-FE-16-06	5/16"	1/4"	7/16"-20	9.7	15.1	5.6	4.5	15.9	SS 316	6000 PSI
4	VK-FJC-FE-04-06	1/4"	3/8"	9/16"-18	9.8	17.2	4.5	7.1	18.0	SS 316	6000 PSI

QTY.:

-

Scale:

NTS

Sheet size:

A4

DWG NO:-

HF - 01

Sheet No.:

01 OF 01

Units:

Millimeter

Revision:

00

